



1050-1080nm Low Power Free Space Faraday Isolators

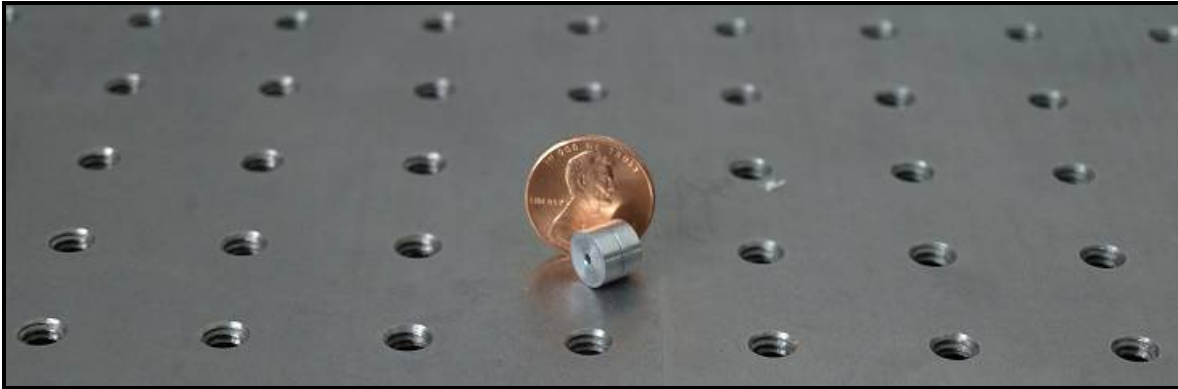

Applications:	Features:
<ul style="list-style-type: none"> • Decouple seed lasers from slave lasers • Eliminate frequency instability in laser diodes due to optical feedback 	<ul style="list-style-type: none"> • Compact size • 2I1064L2 gives >60dB isolation • Great price/performance ratio

Part no. (Model) ^a	Clear Aper. (mm)	Transmission @25°C	Isolation @25°C	Pulsed Damage Threshold @ 10ns
110-10223-0001-0001 (2BIG1064CYL-ISO)	1.5	≥75%	≥30dB	500mW CW
110-10091-0001 (2BIG1064PBS)	1.5	≥75%	≥30dB	1MW/cm ²
110-10097-0001 (2I1064L2)	1.5	≥65%	≥60dB	500mW CW

Notes:
a. Product specifications and pricing subject to change without notice.

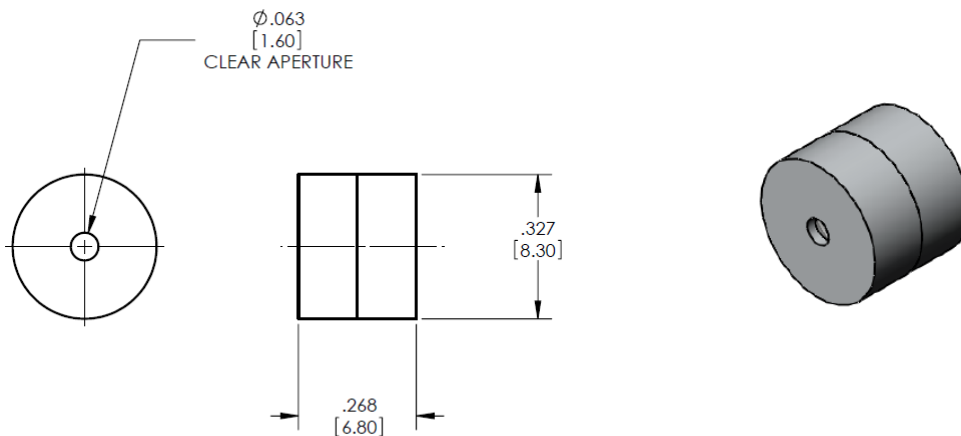

5835 Shugart Lane
Traverse City, MI 49684
(231) 935-4044 (800) 697-6782 FAX: (231) 935-4046
sales@eotech.com www.eotech.com