


1050-1080nm Low Power Free Space Faraday Isolators

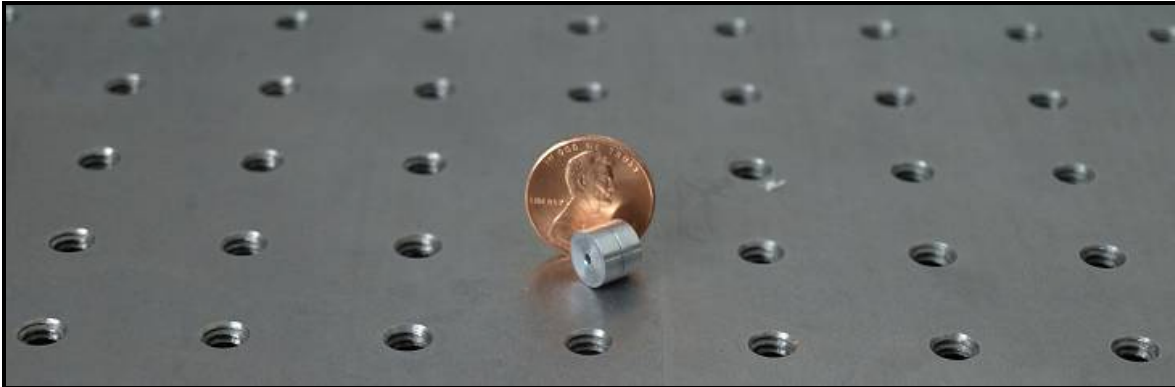


Applications:	Features:
<ul style="list-style-type: none"> Decouple seed lasers from slave lasers 	<ul style="list-style-type: none"> Compact size
<ul style="list-style-type: none"> Eliminate frequency instability in laser diodes due to optical feedback 	<ul style="list-style-type: none"> 2I1064L2 gives >60dB isolation Great price/performance ratio

Part no. (Model) ^a	Clear Aper. (mm)	Transmission @25°C	Isolation @25°C	Pulsed Damage Threshold @ 10ns	List Price (USD)
110-10090-0001 (2BIG1064)	1.5	≥75%	≥30dB	500mW CW	\$450
110-10091-0001 (2BIG1064PBS)	1.5	≥75%	≥30dB	1MW/cm ²	\$750
110-10097-0001 (2I1064L2)	1.5	≥65%	≥60dB	500mW CW	\$2,400

Notes:

- a. Product specifications and pricing subject to change without notice.

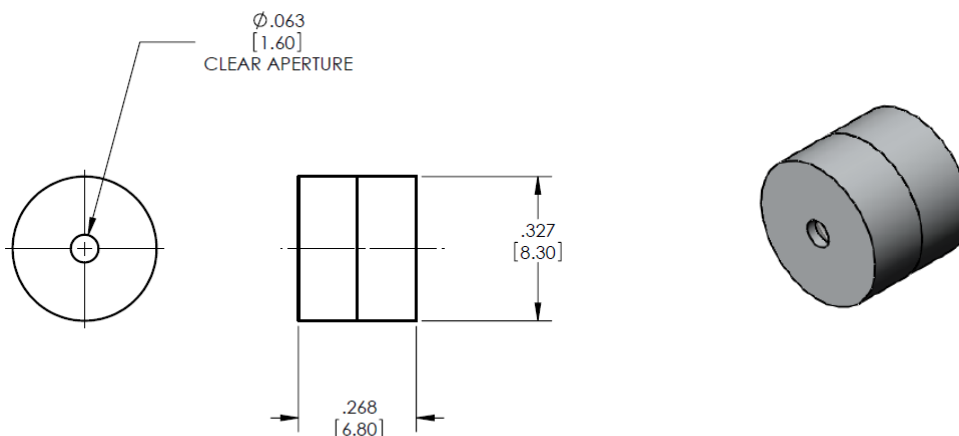

5835 Shugart Lane
Traverse City, MI 49684
(231) 935-4044 (800) 697-6782 FAX: (231) 935-4046
sales@eotech.com www.eotech.com